
General		
	Destar suler	
Shape	Rectangular	
Seating Capacity	5	
Shell Material	Granitex™ / Acrylic	100
Dimensions	83" x 77" x 30" H / (211cm X 196cm x 76cm H)	
Corner Radii	9" (23 cm)	
Water Capacity	245 Gallons (930 Liters)	
Dry Weight	580 lbs (263 kg)	
Shipping Weight	580 lbs (286 kg)	
Full Weight	2620 lbs (1188 kg)	
Skirt Material	Synthetic	
Poly Floor	Yes	
Water System		
Water Treatment System	n/a	
Plumbing Systems	2	
Filters/Coverage	1 / 75 sq. ft.	
Gate Valves	0	
VCR Jet® - Air Adjustable/Directional	0	1
VCR Jet® - Rotator	2	1
VCR Jet® - Dual Rotator	0	1
VCR Jet® - Multi Port Spinner	1	
VCR Jet® - Mini Rotator	3	1
VCR Jet® - Mini Directional	4	1
VCR Jet® - Euro Directional	12	7
VCR Jet® - Euro Rotator	0	7
VCR Jet® - Mini Directional in NFJ	0	1
Typhoon Jet	0	1
Ozone Jet	1	1
Heater Return Jet	0	†
Pump Returns	2	1
Diverter Valves	0	†
Floor Drains	n/a	†
Skimmer	8" Weir	†
Special Features	O Well	
Dynamic Massage Sequencer w/ control panel	n/a	
	0	+
NeckFlex® Jet Pillows		+
Headrest Pillows	0	-
Stereo system	Optional*	+
Water Feature	n/a	-
Water Feature Volume control	n/a	-
Cup Holders	7	4
Tactile Therapy	n/a	
Pump Information	Domestic (60Hz)	Export (50Hz)
Motor Size – Peak (Continuous) HP	3.0 (1.5) HP	3.6 (2.0) HP
Jet Pumps # of Pumps/Speed	One Dual	One Dual
Circulation pump	n/a	n/a
Fountain pump	n/a	n/a
Electrical System	Domestic (60Hz)	Export (50Hz)
Voltage	120/240	240
Amperage	15/30/40	1x16 / 2x16 / 1x32
Heater	4.0 KW	2.0 KW
Thermostat	Electronic	Electronic
Light	1 with optional LED	1 with optional LED
Control System	SSPA-1-D13	SSPA-1-D13-CE
	Programmable Digital	Programmable Digital
Tupper Control	FIOGRAFIII I DIGITAL	
Upper Control Auxiliary Upper Control	No	No


Note: 1. Subject to change without notice. 2. Reference DOC-1404 Rev. A

Doc-1403 Rev. B Rev Date: 11/23/05 Specification, Cove Page 1 of 2

**Cove Specifications Dimension One Spas** 

## Cove **Architectural Specification**

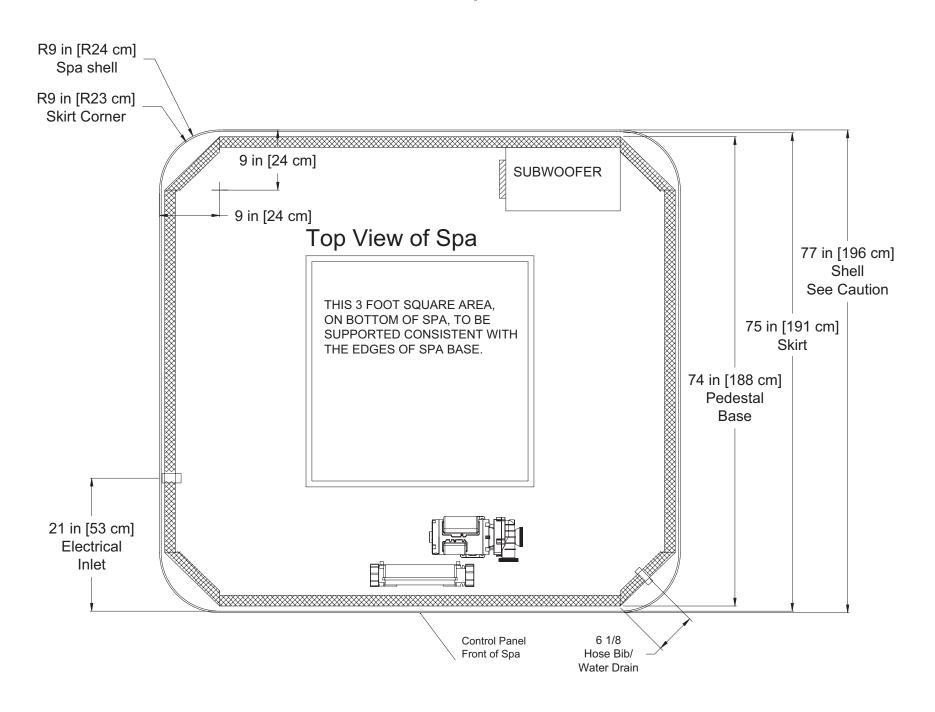

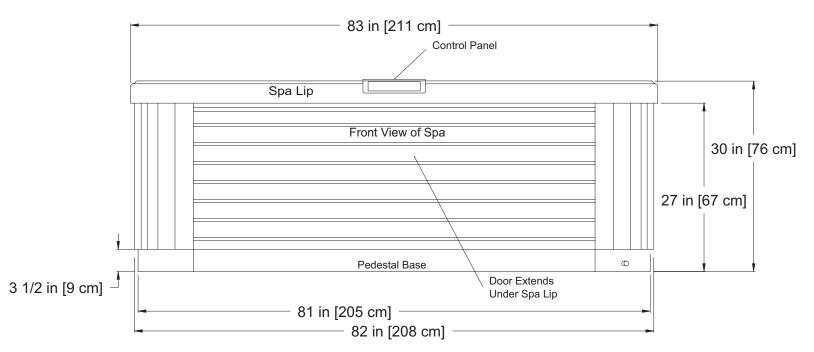

Note: 1. Subject to change without notice.

- Engineering specs may differ slightly from brochure.
   For E-Z lifter installation allow 18" (45.7 cm) clearances on the backside of the spa.
   Alternative cabinets may add significant weight. Ask your dealer for exact details.
- 5. Stereo Optional.

## Caution:

Due to manufacturing tolerances there could be some minor differences between the actual spa and the drawing above. If site planning is critical to such tolerances, be sure to measure your actual spa.